


Simple Installation Guide

EcoBidet
Series

In the Box

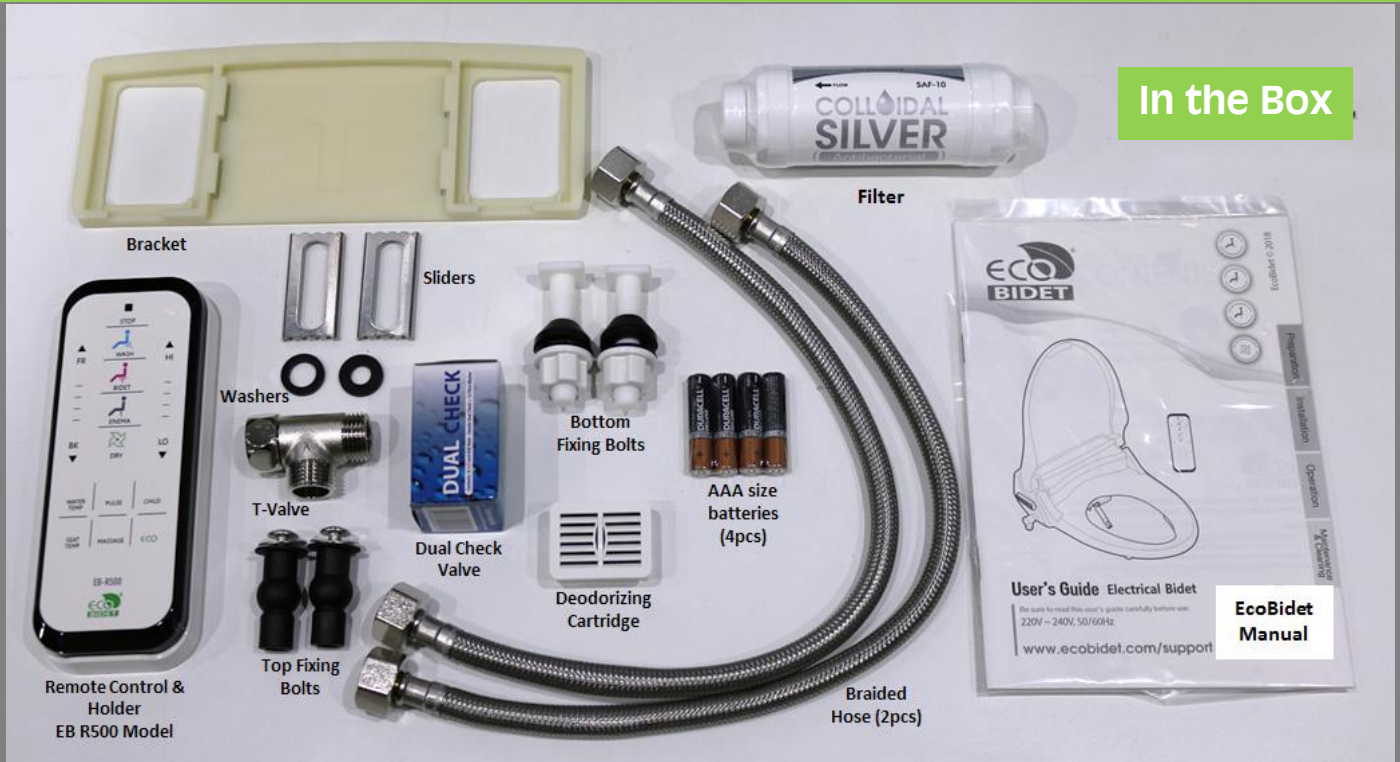

Remove Existing Toilet Seat and Lid



Turn Water Off



Flush the System



5

Disconnect Braided Hose



6

Connect Dual Check Valve to Water Tap



7

Connect T-Piece Adaptor to Dual Check Valve




8

Connect Braided Hose to T-Piece Adaptor



9

Connect Filter to T-Piece Adaptor

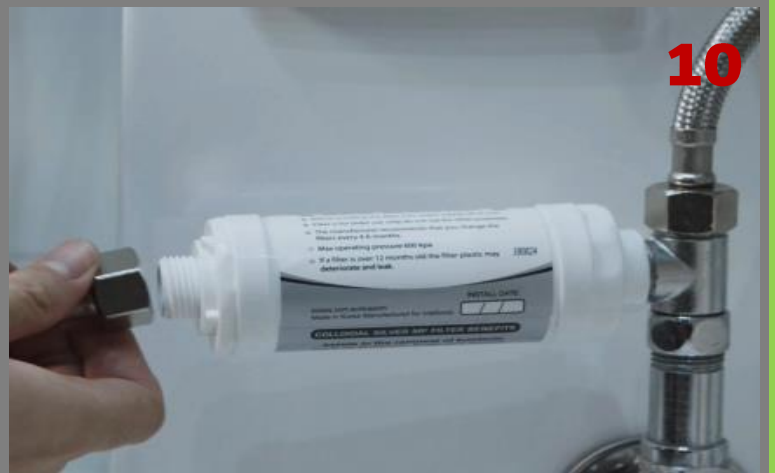

10

Connect Braided Hose to Filter



11

Place Base Plate on Toilet Pan



12

Place Sliders on the Base Plate



Insert Seat Bolts Through Sliders
Into Bolt Holes



Secure the Seat Bolts



Slide the Bidet onto the Base Plate



Connect Braided Hose to Bidet



19



20



21

Turn Water On



22

Turn Power On

Installation & Backflow Requirements

This device must be installed in accordance with AS/NZS 3500.1

Spare Parts: If spare parts (shown in user guide) are needed please contact our help desk

Filters: Manufacturer recommends water filters be replaced every 6-8 months

Please call the helpdesk on 1800 243 387 or 07 5591 7744 for any queries.

Model name	EcoBidet
Power rating	220 V - 240 V~ 50 Hz, 60 Hz
Power consumption	850 W
Operating Water Pressure	110 KPa - 680 KPa
Operating Temperature	0°C- 40°C

THIS DOUCHE SEAT IS SUPPLIED WITH A BACKFLOW PROTECTION DEVICE COMPLYING WITH AS/NZS 3500.1. NO FURTHER BACKFLOW PREVENTION IS REQUIRED FOR CONNECTION TO THE WATER SUPPLY. WMTS-051:2016